




# WR-06 Harmonic Mixer 110-170 GHz: WHMB-06-0001

Farran's WHMB-06-0001 is a high performance harmonic mixer series offering low conversion loss with no bias required. Suitable for use with Keysight and Rohde & Schwarz spectrum analysers for frequency extension applications.



### **Key Facts:**

- · Low conversion loss
- · Flat frequency response
- Product Family frequency coverage up to 500 GHz
- · Unbiased anti-parallel diode pair

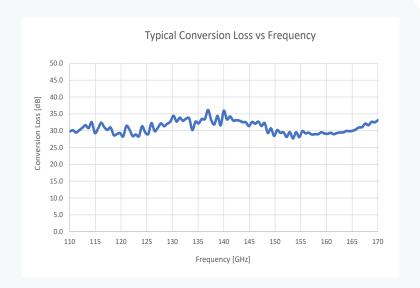

"We have made many Farran purchases, including amplifiers, mixers and multipliers. They are all high-performance devices and always meet our expectations. Farran supplied each component with comprehensive set of test results and a manual, which is not necessarily a given in this industry."



#### **APPLICATIONS**

- Spectrum analysis
- mm-Wave instrumentation
- Signal processing
- · Phased locked loops



- · User Manual
- Diplexer (optional)
- · LO/IF cable (optional)

Microwave Circuit Designer & Engineer, Multinational Electronic Test **Equipment Manufacturer.** 

















# **Product Specification**

| Specification                             | Unit  | Min              | Тур   | Max   |
|-------------------------------------------|-------|------------------|-------|-------|
| Frequency Range                           | GHz   | 110              | -     | 170   |
| IF Frequency Range                        | MHz   | DC               | 741   | 2000  |
| LO Harmonic Number                        | -     | -                | 12    | -     |
| LO Frequency Range                        | GHz   | 9.16             | -     | 14.17 |
| Mixer Conversion Loss SSB (n. trc. meas.) | dB    | -                | 40    | -     |
| LO Input Power                            | dBm   | +12              | +13.5 | +15   |
| Test Port VSWR (typ.)                     | -     | -                | 3.6:1 | -     |
| Test Port Flange (nom.)                   | -     | WR-06, UG-387/UM |       |       |
| LO/IF Connector (nom.)                    | -     | 2.92mm - F       |       |       |
| CW RF Input Level (typ.)                  | dBm   | -                | -     | -10   |
| CW RF Damage Level (nom.)                 | dBm   | 0                | -     | -     |
| Weight (typ.)                             | g     | -                | 35    | -     |
| Dimensions (approx.)                      | mm    | 16 x 20 x 30     |       |       |
| Operating Temperatures (nom.)             | deg C | 0                | -     | 30    |
| Integrated LO/IF Diplexer                 | -     | No               |       |       |
| Bias                                      | -     | Not required     |       |       |



#### **SERVICES AVAILABLE**

- Technical Support
- · Installation and Setup
- Maintenance
- Application Support
- Hardware Support

For more information on any of our products or services please visit our website: www.farran.com



### **TECHNICAL SUPPORT**

- · Technical support provided directly by our knowledgeable and friendly engineers.
- · Support for pre- and postpurchase: system configuration, installation and troubleshooting.



## PRODUCT INSIGHTS

- · For more product insights register at www.farran.com/ customer
- · Additional information: test data, CAD drawings and 3D models available.



#### **WARRANTY**

Standard 1 year warranty.

#### **Specification Definitions**

Nominal value (nom.) - ensured by design, not tested. Measured value (min, max) - expected and warranted product performance obtained from the actual measurements of product sample. Non-traceable measured value (n. trc. meas.) - expected product performance obtained from the actual measurements of a product sample by means of using Farran's own equipment and methods. Traceable only to Farran laboratory equipment. Typical data (typ.) - value that represents the product specification met over 90% of bandwidth or a mean value. Specifications without limits - represent the warranted product performance, with values of no or a negligible deviation from the given value and as such have a secondary impact on the product performance.









